INSUL Sound Insulation Prediction (v9.0.19)

Program copyright Marshall Day Acoustics 2017


- Key No. Job Name: Job No.:

Date:28/2/2020 File Name:est-140.ixl



Authorised INSUL user:Roldan Notes:

> **Acoustic prediction** STC 33

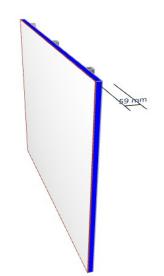

System description (from left to right side of graphic)

Panel 1 : 1 x 3 mm Concrete

+ 1 x 25 mm Poliestireno 20 mm 15 kg/m3

+ 1 x 3 mm Concrete


Frame Furring Channel (28mm x 0.55mm) (28 mm x 38 mm)

Stud spacing 600 mm

Partition surface mass = 14,4 kg/m²

Partition width = 31 mm

freq.(Hz)	TL(dB)	Deviations
50	14	
63	15	
80	16	
100	18	
125	19	0
160	21	0
200	22	-1
250	24	-2
315	25	-4
400	27	-5
500	29	-4
630	30	-4
800	32	-3
1000	34	-2
1250	35	-2
1600	37	0
2000	39	0
2500	40	0
3150	42	0
4000	43	0
5000	44	
Sum		-27
Panel Size : 2,7	m x 4,0 m	

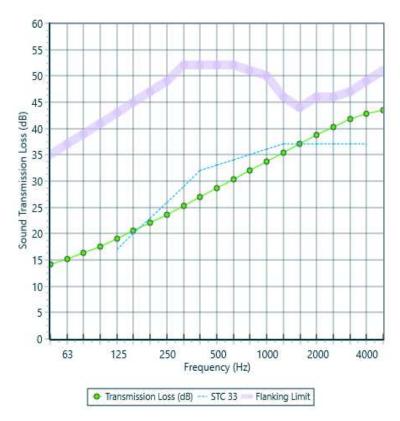

Disclaimer: This is an acoustic prediction and not a laboratory test result. Comparisons with test data show that INSUL predictions are generally within +/- 3 dB for simple constructions, however can be as high as +/- 5 dB for hybrid systems or triple panel constructions. Like any prediction tool, INSUL should not be regarded as a substitute for test data or an acoustic estimate from a suitably qualified Acoustic Engineer who may have a contrary opinion to the prediction shown. For this reason, the prediction stated in this letter should be used as a guide only and not form part of a Project specification or used for certification purposes.

INSUL Sound Insulation Prediction (v9.0.19)

Program copyright Marshall Day Acoustics 2017

- Key No. Job Name: Job No.: INSUL

Authorised INSUL user:Roldan Notes:

Glossary

Date:28/2/2020 File Name:est-140.ixl

dB Decibel. The unit of sound level.

Frequency The number of pressure fluctuation cycles per second of a sound wave. Measured in units of Hertz (Hz).

Octave band Sound, which can occur over a range of frequencies, may be divided into octave bands for analysis. The

audible frequency range is generally divided into 7 octave bands. The octave band frequencies are 63Hz,

The attenuation of sound pressure brought about by a building construction. Transmission loss is specified

 $125\mbox{Hz},\,250\mbox{Hz},\,500\mbox{Hz},\,1\mbox{kHz},\,2\mbox{kHz}$ and $4\mbox{kHz}.$

Transmission loss

STC

(TL) at each octave or one third octave frequency band.

Sound Transmission Class
A single number system for quantifying the transmission loss through a building element. STC is based upon typical speech and domestic noises, and thus is most applicable to these areas. STC of a building

element is measured in approved testing laboratories under ideal conditions.

(refer to ASTM E413 Classification for Rating Sound Insulation)